


Technical Data Sheet Rev 06-240806

RS-232 to RS-232 Mini Port-Powered Isolator

Model Number: GM-1011-B

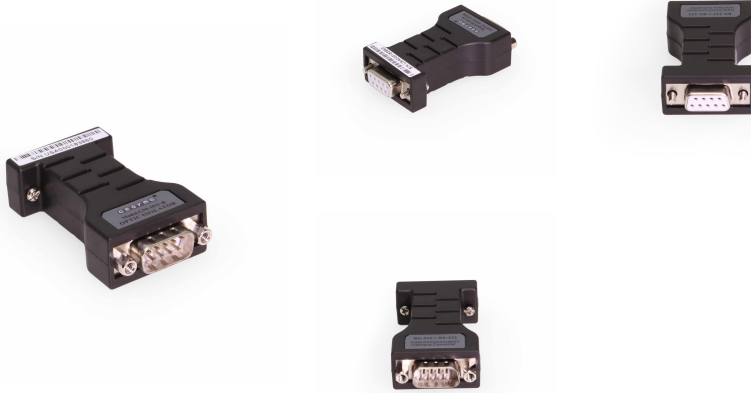

Features

- Standards: RS-232 & CCITT V.24 asynchronous protocol
- Connector: two DB9 on both sides
- Transmission mode: asynchronous full-duplex, full transparent
- Isolated voltage: 2,500Vrms impulse or 500VDC
- Baudrate: 300bps-57,600bps

Package Contents

- Adapter

Specifications

OVERVIEW

Model No	GM-1011-B
Product Type	Serial Adapter
Compliance	None or N/A
UPC	045079162662
Country of Origin	China
LED indicators	None or N/A
Chipset	-
Electrical Protections	N/A

PHYSICAL

Ship Weight (lbs)	0.07 lbs
Ship Weight (kg)	0.03 kg
Item Weight	0.25 lbs
Length	2.441 inches
Width	0.709 inches
Height	1.339 inches
Material	Plastic
Color	Black
Mountable	N/A

Specifications Cont.

CONNECTIONS

Connector(s)	DB9 Female w/ Screws DB9 Male w/ Nuts
Maximum Data Rate	57.6Kbps

SERIAL SPECS

Maximum Data Rate	57.6 Kbps
Minimum Data Rate	300 baud/bps
Serial Modes	RS232

ENVIRONMENTAL

Operating Temperature	0C ~ 60C
Storage Temperature	-20C ~ 70C
Operating Humidity	15 ~ 85% RH

OS SUPPORT

Supported Operating Systems	OS independent - No software or drivers required
-----------------------------	--

WARRANTY

Warranty Period	1 Year
-----------------	--------

PRODUCT URL

Mfg Page	https://www.gearmo.com/shop/rs-232-to-rs-232-mini-port-powered-isolator/
----------	---